


The background of the advertisement features a dark, high-contrast scene with vibrant, diagonal streaks of red, orange, and blue light, suggesting speed and motion. A bright, glowing light source is visible on the right side, creating a sense of energy and excitement.

2025
RANGE

aprilia[®]



RSV4

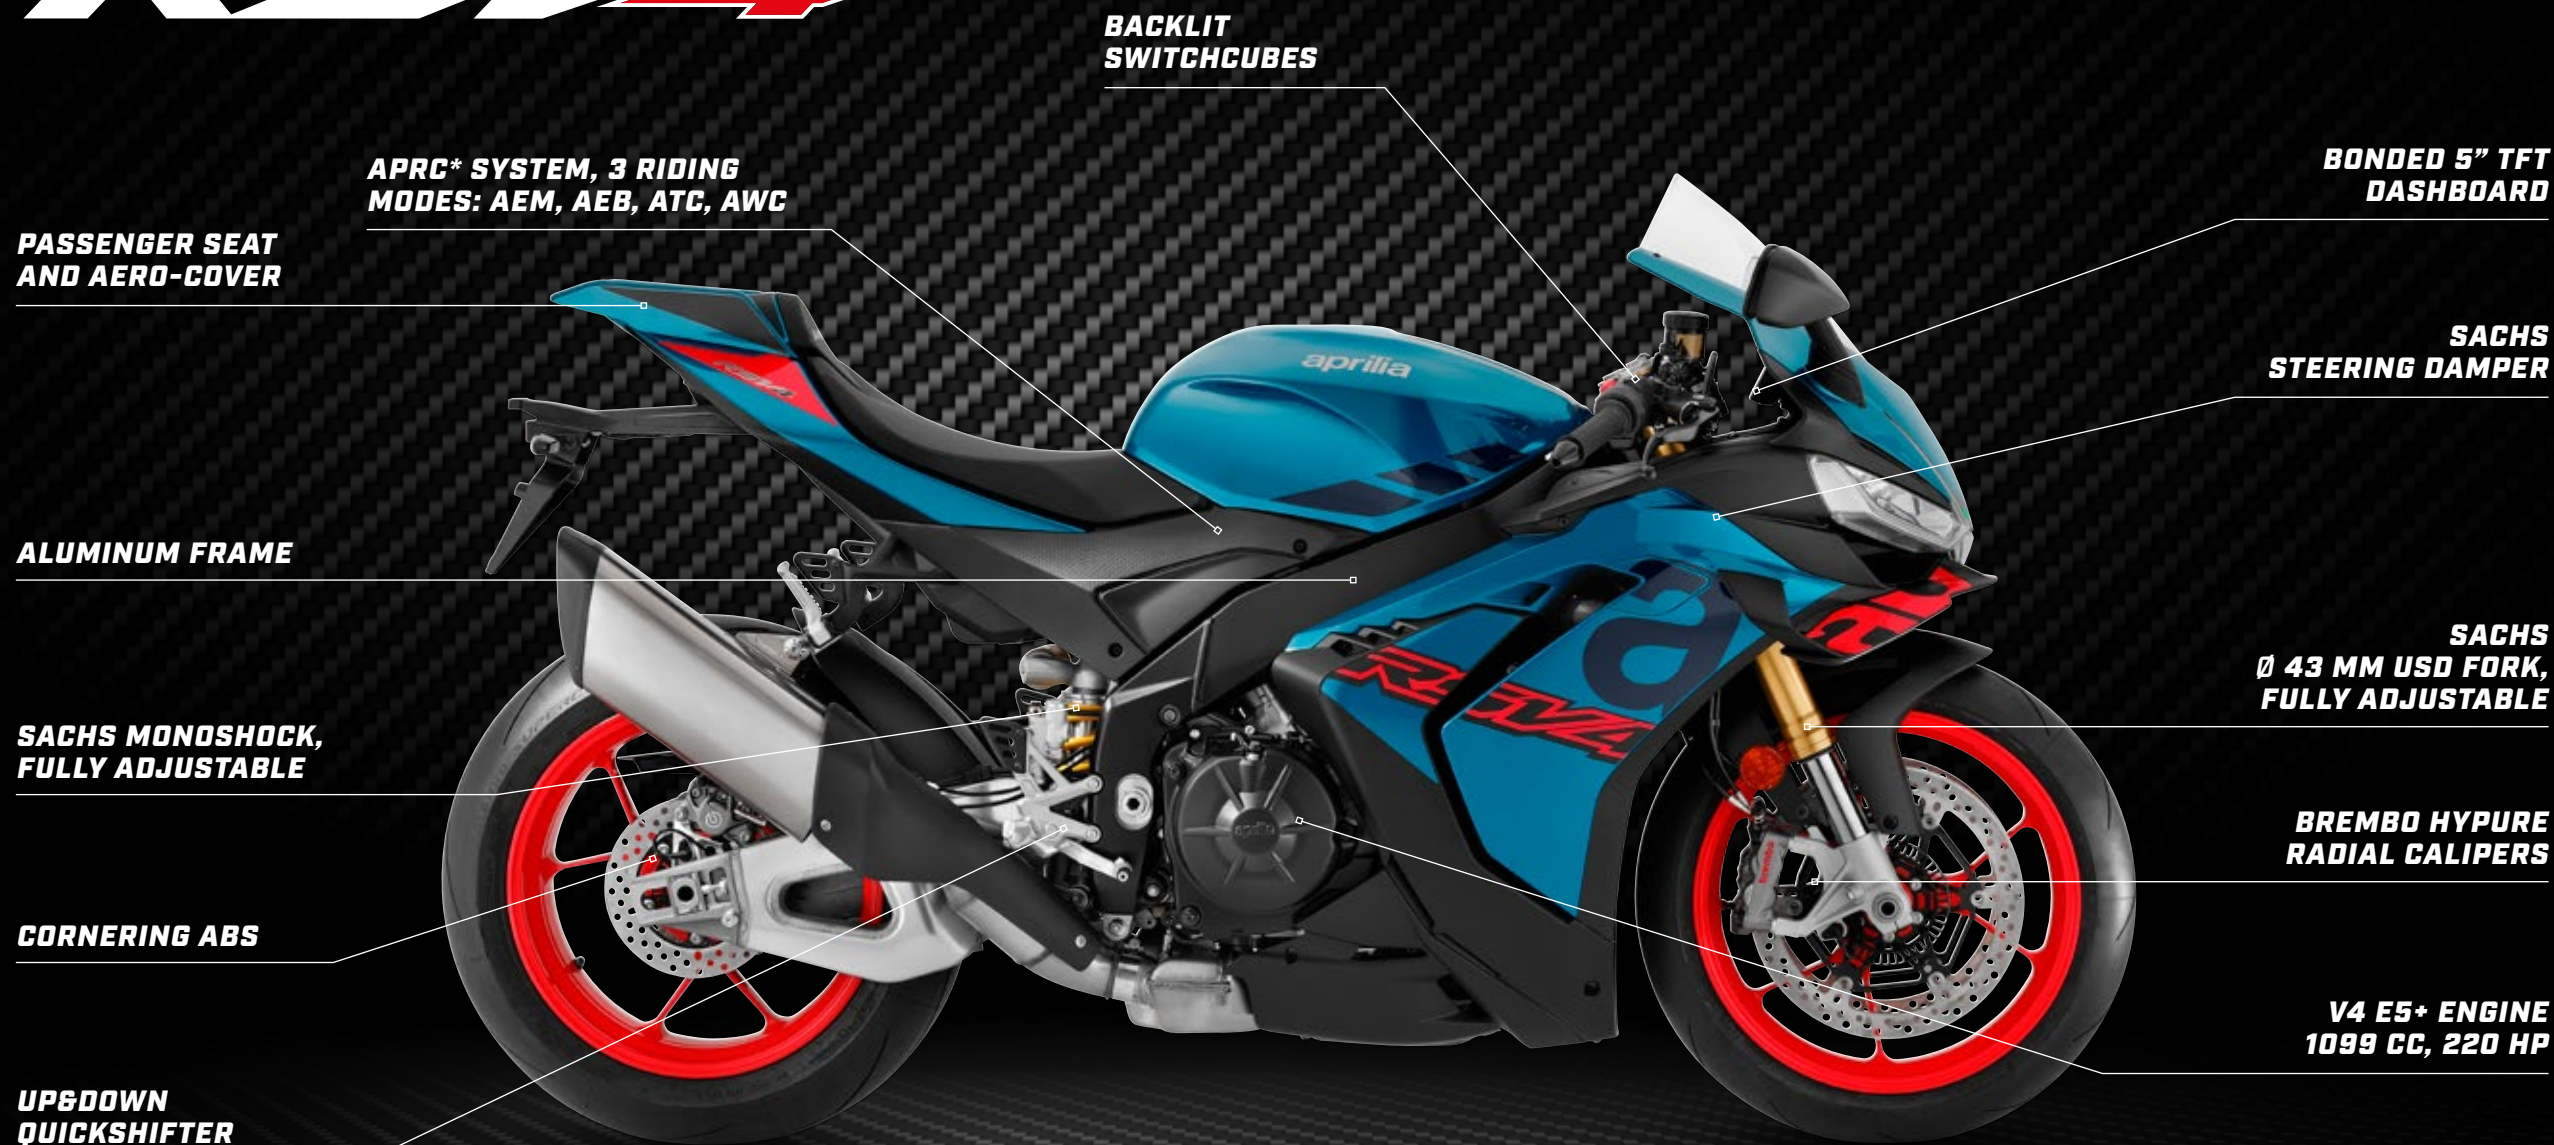

* **Aprilia Performance Ride Control** Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Adaptive and predictive Wheelie Control (AWC)

RSV4

FACTORY



* **Aprilia Performance Ride Control** Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Adaptive and predictive Wheelie Control (AWC), Aprilia Quick Shift (AQS), Aprilia Cruise Control (ACC), Aprilia Launch Control (ALC), Aprilia Pit Limiter (APL), Aprilia Slide Control (ASC)

RS660

**BACKLIT
SWITCHCUBES**

**APRC* SYSTEM, 5 RIDING MODES:
AEM, AEB, ATC, AWC, ALC, ACC**

**BONDED 5" TFT
DASHBOARD**

ALUMINUM FRAME

**KAYABA MONOSHOCK,
REBOUND AND PRELOAD
ADJUSTABLE**

CORNERING ABS

**UP&DOWN
QUICKSHIFTER**

**KAYABA Ø 41 MM
USD FORK, REBOUND
AND PRELOAD
ADJUSTABLE**

**BREMBO
RADIAL CALIPERS**

**E5+ PARALLEL TWIN
659 CC, 105 HP**

WET WEIGHT 183 KG

* **Aprilia Performance Ride Control** Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Wheelie Control (AWC), Aprilia Launch Control (ALC), Cruise Control (ACC)

RS660 FACTORY

**APRC* SYSTEM, 5 RIDING MODES:
AEM, AEB, ATC, AWC, ALC, ACC**

**EXCLUSIVE
FACTORY LIVERY**

**BACKLIT
SWITCHCUBES**

**BONDED 5" TFT
DASHBOARD**

ALUMINUM FRAME

**ÖHLINS MONOSHOCK,
FULLY ADJUSTABLE**

CORNERING ABS

**UP&DOWN
QUICKSHIFTER**

**ÖHLINS
Ø 43 USD FORK, FULLY
ADJUSTABLE**


**BREMBO
RADIAL CALIPERS**

**E5+ PARALLEL TWIN
659 CC, 105 HP**

WET WEIGHT 183 KG

* **Aprilia Performance Ride Control** Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Wheelie Control (AWC), Aprilia Launch Control (ALC), Cruise Control (ACC)

RS 457

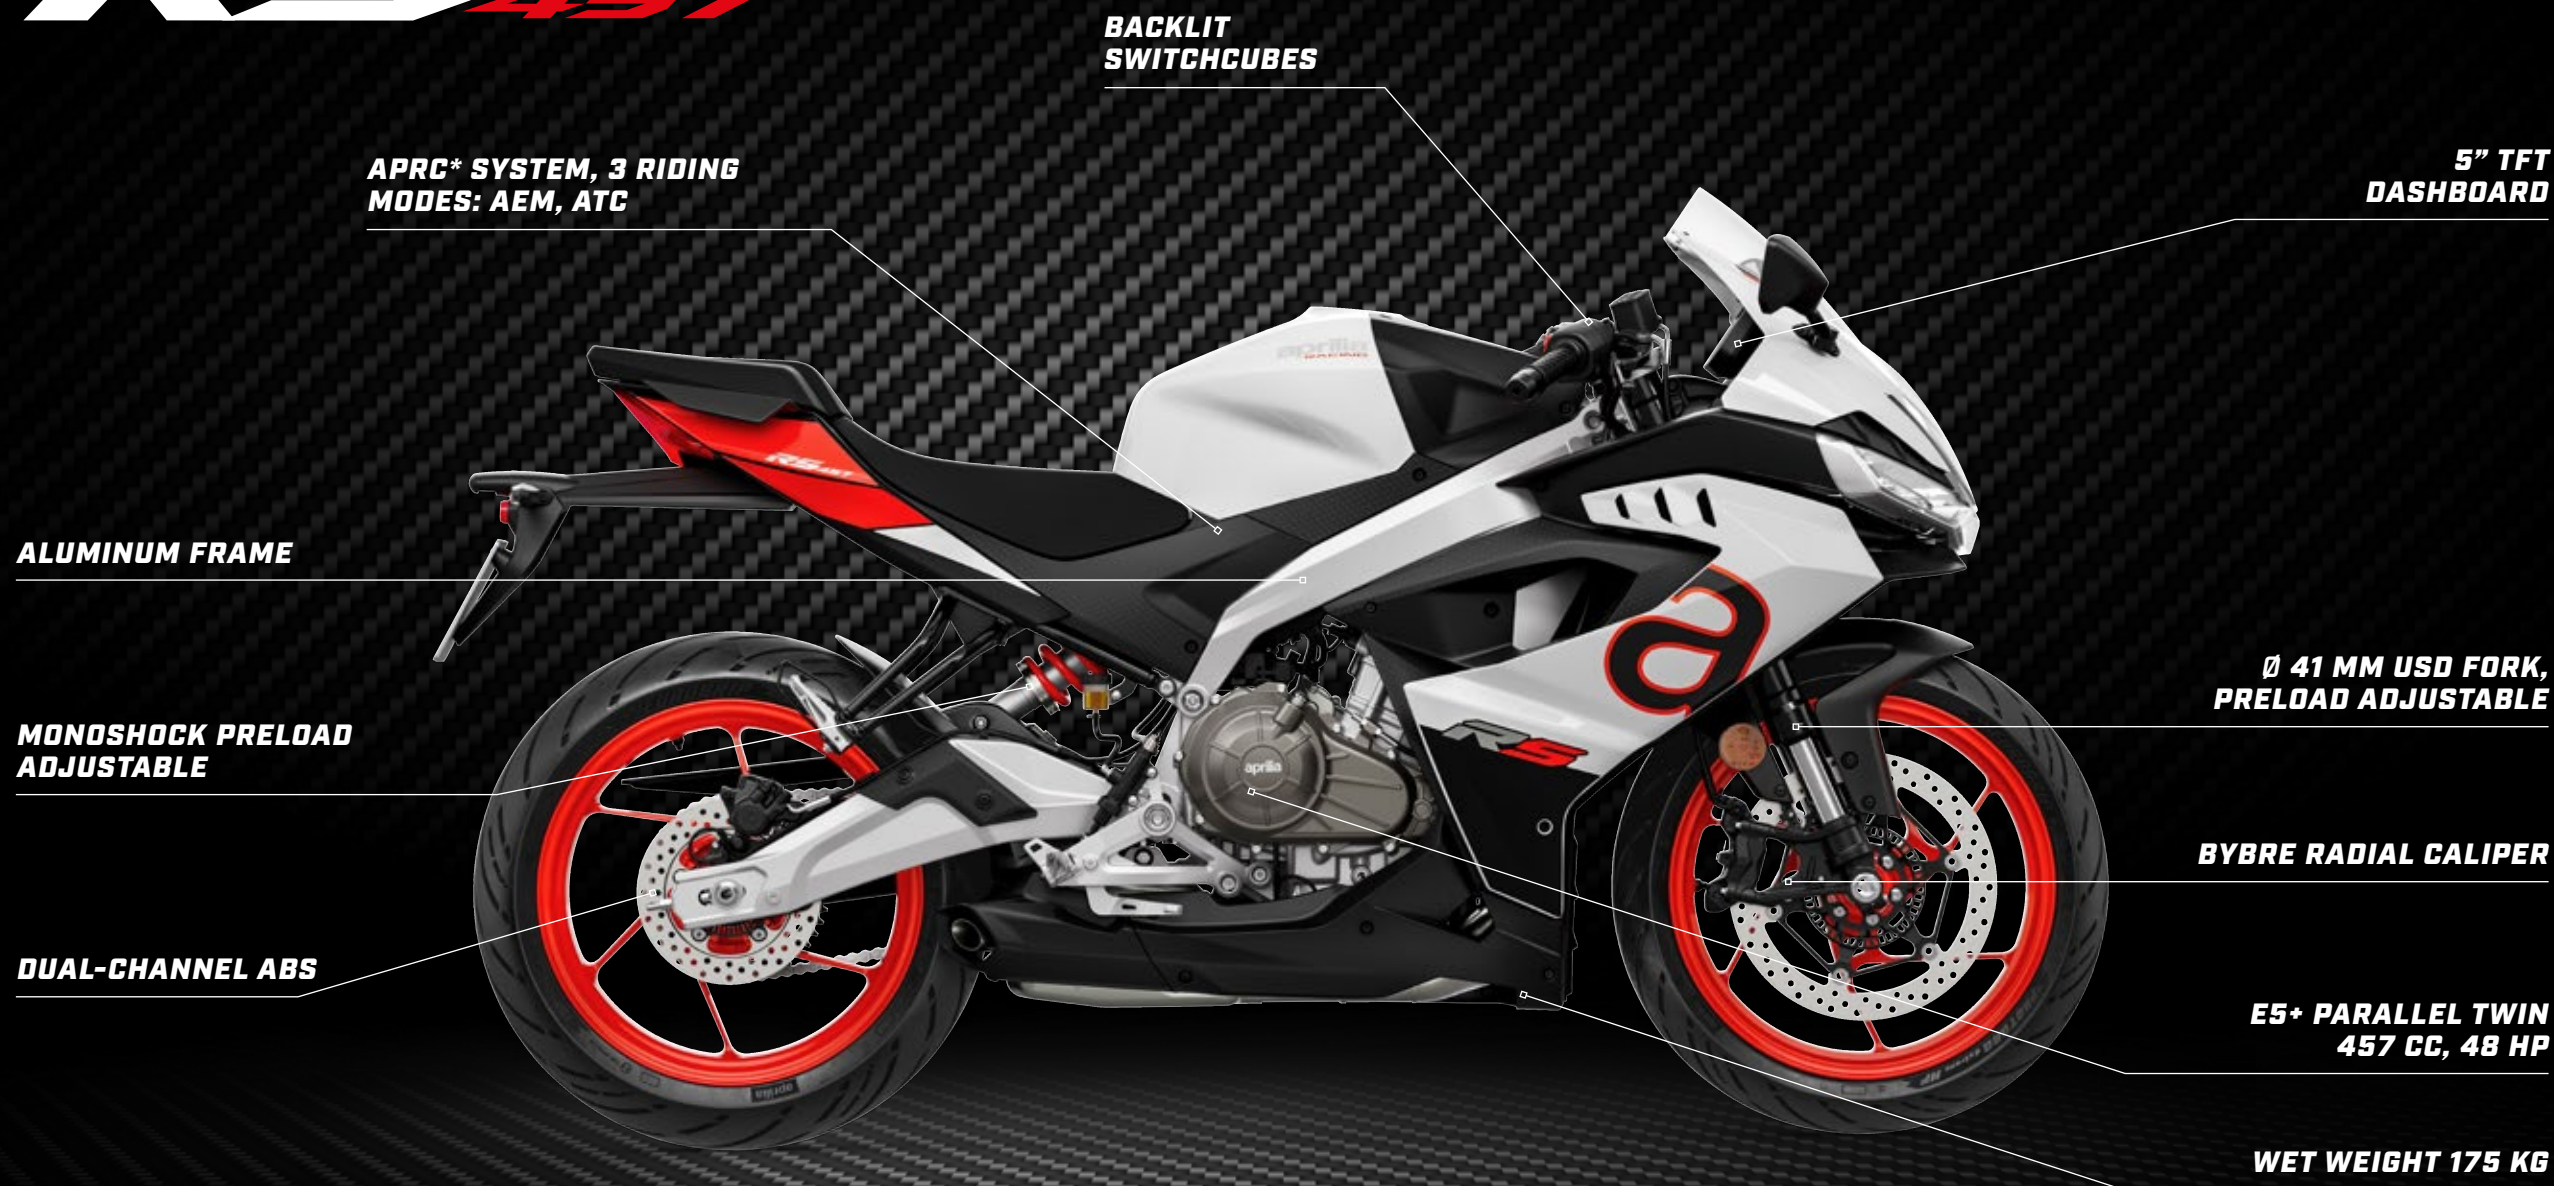

**APRC* SYSTEM, 3 RIDING
MODES: AEM, ATC**

**BACKLIT
SWITCHCUBES**

**5" TFT
DASHBOARD**

ALUMINUM FRAME

**MONOSHOCK PRELOAD
ADJUSTABLE**

DUAL-CHANNEL ABS

**Ø 41 MM USD FORK,
PRELOAD ADJUSTABLE**

BYBRE RADIAL CALIPER

**E5+ PARALLEL TWIN
457 CC, 48 HP**

WET WEIGHT 175 KG

*** Aprilia Performance Ride Control** Engine maps (AEM), Traction Control (ATC)



RS 457

RS125



The image features a central white logo on a dark background. The logo is composed of a series of slanted, parallel bars that form the letters 'TUDOR'. The letters are stylized, with the 'T' and 'D' having a distinctive shape. The background is a deep navy blue, overlaid with a vibrant, jagged lightning bolt that transitions from a bright blue at its base to a deep purple at its tip. The lightning bolt appears to be crackling with energy, with smaller, fainter bolts branching out from the main one.

TUDOR

TVS RUDRA 14



PASSENGER SEAT
AND AERO-COVER

APRC* SYSTEM, 3 RIDING
MODES: AEM, AEB, ATC, AWC

ALUMINUM FRAME

SACHS MONOSHOCK,
FULLY ADJUSTABLE

CORNERING ABS

UP&DOWN
QUICKSHIFTER

BACKLIT
SWITCHCUBES

BONDED 5" TFT
DASHBOARD

SACHS
STEERING DAMPER

SACHS
Ø 43 MM USD FORK,
FULLY ADJUSTABLE

BREMBO
RADIAL CALIPERS

V4 E5+ ENGINE
1099 CC, 180 HP

* Aprilia Performance Ride Control Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Adaptive and predictive Wheelie Control (AWC)

TUONO V4 FACTORY



* **Aprilia Performance Ride Control** Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Adaptive and predictive Wheelie Control (AWC), Aprilia Quick Shift (AQS), Aprilia Cruise Control (ACC), Aprilia Launch Control (ALC), Aprilia Pit Limiter (APL), Aprilia Slide Control (ASC)

TUONO 660 FACTORY



* Aprilia Performance Ride Control Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Wheelie Control (AWC), Aprilia Launch Control (ALC), Cruise Control (ACC)

TUONO 457

BACKLIT
SWITCHCUBES

APRC* SYSTEM, 3 RIDING
MODES: AEM, ATC

5" TFT
DASHBOARD

ALUMINUM FRAME

MONOSHOCK PRELOAD
ADJUSTABLE

DUAL-CHANNEL ABS

Ø 41 MM USD FORK,
PRELOAD ADJUSTABLE

BYBRE RADIAL CALIPER

E5+ PARALLEL TWIN
457 CC, 48 HP

WET WEIGHT 175 KG

* Aprilia Performance Ride Control Engine maps (AEM), Traction Control (ATC)

TUONO 457



TVORNO 125

14.5 LITERS TANK

DIGITAL DASHBOARD

**FULL LED HEADLIGHT
AND INDICATORS**

ALUMINUM FRAME

Ø 40 MM USD FORK

RADIAL CALIPER

**E5+ ENGINE
125 CC, 15 HP**

DUAL-CHANNEL ABS

TRACTION CONTROL



TURBO

TUAREG

**APRC* SYSTEM, 4 RIDING MODES:
AEM, AEB, ATC, ACC**

18 LITERS TANK

**BONDED 5" TFT
DASHBOARD**

**KAYABA
Ø 43 USD FORK, FULLY
ADJUSTABLE, 240 MM
WHEELTRAVEL**

**KAYABA MONOSHOCK,
FULLY ADJUSTABLE,
240 MM WHEEL TRAVEL**

**BREMBO
FLOATING CALIPERS**

DUAL-CHANNEL ABS

**E5+ PARALLEL TWIN
659 CC, 80 HP**

*** Aprilia Performance Ride Control** Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Cruise Control (ACC)



TUAREG

Tuareg is equipped with optional accessories

TUAREG RALLY

APRC* SYSTEM, 4 RIDING MODES:
AEM, AEB, ATC, ACC

18 LITERS TANK

RALLY HIGH SEAT WITH
ANTI-SLIP INSERTS

SC-PROJECT SLIP-ON

KAYABA MONOSHOCK,
OFF-ROAD TUNED, FULLY
ADJUSTABLE, 240 MM
WHEEL TRAVEL

DUAL-CHANNEL ABS

CHAINGUIDE

RALLY SIDESTAND

ANODIZED SPECIFIC
HANDLEBAR

HANDGUARDS WITH
ALUMINUM FRAME

BONDED 5" TFT
DASHBOARD

HIGH MUDGUARD

KAYABA Ø 43 MM USD OFF-ROAD
TUNED FORK, FULLY ADJUSTABLE,
240 MM WHEEL TRAVEL

HEAVY-DUTY SPOKED
WHEELS WITH INNER TUBE

BREMBO
FLOATING CALIPERS

E5+ PARALLEL TWIN
659 CC, 80 HP

OFF-ROAD
SKIDPLATE

* Aprilia Performance Ride Control Engine Maps (AEM), Engine Brake (AEB), Traction Control (ATC), Cruise Control (ACC)



TUAREG RALLY

The image features a stylized logo consisting of the letters 'SX' stacked above 'RX'. The letters are white, bold, and have a slightly italicized, modern font. The background is a dark blue gradient with horizontal, wavy lines in shades of blue and purple, creating a sense of motion or digital energy.

SX
RX

SX125

**INTEGRATED
PASSENGER GRAB
HANDLES**

**BLACK FINISHED
SHORT MUFFLER**

**ABS WITH ANTI
ROLL-OVER SYSTEM**

**E5+ ENGINE
125 CC, 15 HP**

**DIGITAL COLORED
DASHBOARD**

**FULL LED HEADLIGHT
AND INDICATORS**

Ø 41 MM USD FORK

17" MOTARD WHEEL

300 MM DISC

SKIDPLATE



RX125

**INTEGRATED
PASSENGER GRAB
HANDLES**

**BLACK FINISHED
SHORT MUFFLER**

**ABS WITH ANTI
ROLL-OVER SYSTEM**

**E5+ ENGINE
125 CC, 15 HP**

**DIGITAL COLORED
DASHBOARD**

**FULL LED HEADLIGHT
AND INDICATORS**

Ø 41 MM USD FORK

**21" OFF-ROAD
SPOKED WHEEL**

WAVE DISCS

SKIDPLATE



LIFESTYLE CLOTHING

DISCOVER THE ENTIRE COLLECTION
AT [STORE.APRILIA.COM](https://store.aprilia.com)





HELMETS AND TECHNICAL CLOTHING

DISCOVER THE ENTIRE RANGE OF HELMETS
AND TECHNICAL CLOTHING
AT [STORE.APRILIA.COM](https://store.aprilia.com)



ACCESSORIES

***GET THE BEST FOR YOUR APRILIA BIKE.
CHOOSE THE SAFETY OF ORIGINAL ACCESSORIES
AND ONLY BUY ACCESSORIES DESIGNED,
DEVELOPED AND TESTED TO DRAW THE BEST
PERFORMANCE FROM YOUR MOTORBIKE.***

EXPLORE THE FULL RANGE AT [APRILIA.COM](https://www.aprilia.com)

RSV4



STINGRAY
BLUE



POISON
YELLOW

RSV4 FACTORY



DARK
KRAKEN

RS 660



BLUE
MARLIN



VENOM
YELLOW

RS 660 FACTORY



DARK
BANSHEE

RS 457



RACING
STRIPES



PRISMATIC
DARK



OPALESCENT
LIGHT

RS 125



KINGSSNAKE
WHITE



CYANIDE
YELLOW

TUONO V4



SCORPION
YELLOW



SHARK
GREY

TUONO V4 FACTORY



DARK
KRAKEN

TUONO 660 FACTORY



DARK
BANSHEE

TUONO 457



PIRANHA
RED



PUMA
GREY

TUONO 125



VIPER
YELLOW



MAMBA
GREY

TUAREG 660



HAILSTORM
WHITE



TORNADO
GREEN

TUAREG RALLY



RALLY

SX 125



VARANUS
BLACK



CUBOZOA
WHITE

RX 125



VARANUS
BLACK



CUBOZOA
WHITE

COLOUR RANGE 2025

For more information
visit aprilia.com

	<i>RSV4</i>		<i>RSV4 FACTORY</i>		<i>RS 660</i>		<i>RS 660 FACTORY</i>		<i>RS 457</i>		<i>RS 125</i>	
<i>Engine</i>												
<i>Type</i>	V4 (65°), 4 valves per cylinder, liquid-cooled with Ride-By-Wire				Parallel twin, 4 valves per cylinder, liquid-cooled with Ride-By-Wire				Parallel twin, 4 valves per cylinder, liquid-cooled with Ride-By-Wire		Single-cylinder, 4 valves, liquid-cooled	
<i>Displacement</i>	1,099 cc				659 cc				457 cc		124.2 cc	
<i>Bore and stroke</i>	81 x 53.32 mm				81 x 63.93 mm				69 x 61.1 mm		58 x 47 mm	
<i>Max. power</i>	220 HP (161.8 kW) @ 13,000 rpm				105 HP (77.2 kW) @ 10,400 rpm				47.6 HP (35 kW) @ 9,400 rpm		15 HP (11 kW) @ 10,500 rpm	
<i>Max. torque</i>	127 Nm @ 10,800 rpm				70 Nm @ 8,400 rpm				43.5 Nm @ 6,700 rpm		11.4 Nm @ 8,500 rpm	
<i>Clutch</i>	Multiplate wet clutch with slipper system				Multi plate wet clutch with slipper system				Multi plate wet clutch with slipper system		Multi plate wet clutch	
<i>Gearbox</i>	6 speed				6 speed				6 speed		6 speed	
<i>Chassis</i>												
<i>Frame</i>	Twin spar aluminum frame				Twin spar aluminum frame				Twin spar aluminum frame		Twin spar aluminum frame	
<i>Front suspension</i>	Sachs Ø 43 mm USD fork, fully adjustable, 127 mm wheel travel		Öhlins Ø 43 mm electronically controlled USD fork, fully adjustable, 125 mm wheel travel		Kayaba Ø 41 mm USD fork, rebound and preload adjustable, 120 mm travel		Öhlins Ø 43 mm USD fork, fully adjustable, 120 mm wheel travel		Ø 41mm USD fork, adjustable preload, 120 mm wheel travel		Ø 40 mm USD fork, 110 mm wheel travel	
<i>Rear suspension</i>	Sachs monoshock, fully adjustable, 130 mm wheel travel		Öhlins electronically controlled monoshock, fully adjustable, 115 mm wheel travel		Kayaba monoshock, rebound and preload adjustable, 130 mm wheel travel		Öhlins monoshock, fully adjustable, 130 mm wheel travel		Monoshock, adjustable preload, 130 mm wheel travel		Monoshock, 120 mm wheel travel	
<i>Front brake</i>	Double Ø 330 mm floating disc. Brembo HYPURE radial calipers				Double Ø 320 mm floating disc. Brembo radial calipers				Ø 320 mm floating disc. ByBre 4-piston radial caliper		Ø 300 mm stainless steel disc with floating caliper	
<i>Rear brake</i>	Ø 220 mm disc. Brembo caliper				Ø 220 mm disc. Brembo caliper				Ø 220 mm disc. ByBre caliper		Ø 218 mm stainless steel disc with floating caliper	
<i>Front wheel</i>	Cast wheel 17" x 3.5" 3 split spokes		Forged wheel 17" x 3.5", 5 split spokes		Cast wheel 17" x 3.5"				Cast wheels 17" x 3"		Cast wheels 17" x 2.75", 6 split spokes	
<i>Rear wheel</i>	Cast wheel 17" x 6" 3 split spokes		Forged wheel 17" x 6", 5 split spokes		Cast wheel 17" x 5.5"				Cast wheels 17" x 4.5"		Cast wheels 17" x 3.5", 6 split spokes	
<i>Dimensions & Weights</i>												
<i>Seat height</i>	840 mm				820 mm				800 mm		820 mm	
<i>Fuel tank capacity</i>	18 lt				15 lt				13 lt		14.5 lt	
<i>Wet weight*</i>	204 Kg				183 Kg				175 Kg		144 Kg	
<i>Std. Features</i>												
<i>Standard Features</i>	Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard. Backlit switchcubes. APRC system with 6-axis inertial platform: Engine Maps (AEM), Engine Brake (AEB), Cornering ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), adaptive and predictive Wheelie Control (AWC), 3 Riding Modes. Aprilia Quick Shift (AQS). Sachs steering damper. Metal Braided Brake Hoses. Passenger seat and Aero-cover		Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard with Race mode. Backlit switchcubes. Aprilia MIA. GPS and Lap Trigger. APRC system with 6-axis inertial platform: Engine Maps (AEM), Engine Brake (AEB), Cornering ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), adaptive and predictive Wheelie Control (AWC), 6 Riding Modes. Aprilia Quick Shift (AQS). Bending lights, Aprilia Cruise Control (ACC), Aprilia Launch Control (ALC), Aprilia Pit Limiter (APL), Aprilia Slide Control (ASC). Öhlins electronically controlled steering damper. CornerByCorner Engine + Suspension. Metal Braided Brake Hoses. Passenger seat and Aero-cover		Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard. Backlit switchcubes. APRC system with 6-axis inertial platform: Engine Maps (AEM), Engine Brake (AEB), Cornering ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), Wheelie Control (AWC), Aprilia Launch Control (ALC), 5 Riding Modes. Cruise Control (ACC). Aprilia Quick Shift (AQS). Metal Braided Brake Hoses		Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard. Backlit switchcubes. APRC system with 6-axis inertial platform: Engine Maps (AEM), Engine Brake (AEB), Cornering ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), Wheelie Control (AWC), Aprilia Launch Control (ALC), 5 Riding Modes. Cruise Control (ACC). Aprilia Quick Shift (AQS). Metal Braided Brake Hoses		Full LED headlight and indicators. 5" TFT dashboard. Backlit switchcubes. Engine maps (AEM), Dual-Channel ABS with Anti Roll-Over System (2 maps), Traction Control (ATC), 3 Riding Modes. Metal Braided Brake Hoses		Dual-channel ABS with anti roll-over system. Full LED headlight and indicators. Aprilia Traction Control (ATC)	

*According to guideline VO (EU) 168/2013 with all fluids, with standard equipment and fuelled with at least 90% of usable tank volume

	<i>TUONO V4</i>		<i>TUONO V4 FACTORY</i>	<i>TUONO 660 FACTORY</i>	<i>TUONO 457</i>	<i>TUONO 125</i>
<i>Engine</i>						
<i>Type</i>	V4 (65°), 4 valves per cylinder, liquid-cooled with Ride-By-Wire			Parallel twin, 4 valves per cylinder, liquid-cooled with Ride-By-Wire	Parallel twin, 4 valves per cylinder, liquid-cooled with Ride-By-Wire	Single-cylinder, 4 valves, liquid-cooled
<i>Displacement</i>	1,099 cc			659 cc	457 cc	124.2 cc
<i>Bore and stroke</i>	81 x 53.32 mm			81 x 63.93	69 x 61.1 mm	58 x 47 mm
<i>Max. power</i>	180 HP (132.4 kW) @ 11,800 rpm			105 HP (77.2 kW) @ 10,400 rpm	47.6 HP (35 kW) @ 9,400 rpm	15 HP (11 kW) @ 10,500 rpm
<i>Max. torque</i>	121 Nm @ 9,650 rpm			70 Nm @ 8,400 rpm	43.5 Nm @ 6,700 rpm	11.4 Nm @ 8,500 rpm
<i>Clutch</i>	Multiplate wet clutch with slipper system			Multi plate wet clutch with slipper system	Multi plate wet clutch with slipper system	Multi plate wet clutch
<i>Gearbox</i>	6 speed			6 speed	6 speed	6 speed
<i>Chassis</i>						
<i>Frame</i>	Twin spar aluminum frame			Twin spar aluminum frame	Twin spar aluminum frame	Twin spar aluminum frame
<i>Front suspension</i>	Sachs Ø 43 mm USD fork, fully adjustable, 117 mm wheel travel	Öhlins Ø 43 mm electronically controlled USD fork, fully adjustable, 120 mm wheel travel	Öhlins Ø 43 mm USD fork, fully adjustable, 110 mm wheel travel	Ø 41mm USD fork, adjustable preload, 120 mm wheel travel	Ø 40 mm USD fork, 110 mm wheel travel	
<i>Rear suspension</i>	Sachs monoshock, fully adjustable, 130 mm wheel travel	Öhlins electronically controlled monoshock, fully adjustable, 130 mm wheel travel	Öhlins monoshock, fully adjustable, 130 mm wheel travel	Monoshock, adjustable preload, 130 mm wheel travel	Monoshock, 120 mm wheel travel	
<i>Front brake</i>	Double Ø 330 mm floating disc. Brembo radial calipers			Double Ø 320 mm floating disc. Brembo radial calipers	Ø 320 mm floating disc. ByBre 4-piston radial caliper	Ø 300 mm stainless steel disc with floating caliper
<i>Rear brake</i>	Ø 220 mm disc. Brembo caliper			Ø 220 mm disc. Brembo caliper	Ø 220 mm disc. ByBre caliper	Ø 218 mm stainless steel disc with floating caliper
<i>Front wheel</i>	Cast wheel 17" x 3.5"			Cast wheel 17" x 3.5"	Cast wheels 17" x 3"	Cast wheels 17" x 2.75", 6 split spokes
<i>Rear wheel</i>	Cast wheel 17" x 6"			Cast wheel 17" x 5.5"	Cast wheels 17" x 4.5"	Cast wheels 17" x 3.5", 6 split spokes
<i>Dimensions & Weights</i>						
<i>Seat height</i>	836 mm			820 mm	800 mm	810 mm
<i>Fuel tank capacity</i>	18 lt			15 lt	12.7 lt	14.5 lt
<i>Wet weight*</i>	211 Kg			181 Kg	175 Kg	144 Kg
<i>Std. Features</i>						
<i>Standard Features</i>	Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard. Backlit switchcubes. APRC system with 6-axis inertial platform: Engine Maps (AEM), Engine Brake (AEB), Cornering ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), Adaptive and predictive Wheelie Control (AWC), 3 Riding Modes. Aprilia Quick Shift (AQS). Sachs steering damper. Metal Braided Brake Hoses. Passenger seat and Aero-cover	Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard with Race mode. Backlit switchcubes. APRC system with 6-axis inertial platform: Engine Maps (AEM), Engine Brake (AEB), Cornering ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), adaptive and predictive Wheelie Control (AWC), 6 Riding Modes. Aprilia Quick Shift (AQS). Bending lights, Aprilia Cruise Control (ACC), Aprilia Launch Control (ALC), Aprilia Pit Limiter (APL), Aprilia Slide Control (ASC). Öhlins electronically controlled steering damper. Metal Braided Brake Hoses. Passenger seat and Aero-cover	Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard. Backlit switchcubes. APRC system with 6-axis inertial platform: Engine Maps (AEM), Engine Brake (AEB), Cornering ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), Wheelie Control (AWC), Aprilia Launch Control (ALC), 5 Riding Modes. Cruise Control (ACC). Aprilia Quick Shift (AQS). Metal Braided Brake Hoses. Black painted swingarm and frame	Full LED headlight and indicators. 5" TFT dashboard. Backlit switchcubes. Engine Maps (AEM), Dual-Channel ABS with Anti Roll-Over System (2 maps), Traction Control (ATC), 3 Riding Modes. Metal Braided Brake Hoses	Dual-channel ABS with anti roll-over system. Full LED headlight and indicators. Aprilia Traction Control (ATC) Black painted frame	

*According to guideline VO (EU) 168/2013 with all fluids, with standard equipment and fuelled with at least 90% of usable tank volume

	TUAREG 660		TUAREG RALLY	SX 125	RX 125
Engine					
Type	Parallel twin, 4 valves per cylinder, liquid-cooled with Ride-By-Wire			Single-cylinder, 4 valves, liquid-cooled	
Displacement	659 cc			124,2 cc	
Bore and stroke	81 x 63.93 mm			58 x 47 mm	
Max. power	80 HP (59 kW) @ 9,250 rpm			15 HP (11 kW) @ 10,500 rpm	
Max. torque	70 Nm @ 6,500 rpm			11.4 Nm @ 8,500 rpm	
Clutch	Multi plate wet clutch with slipper system			Multi plate wet clutch	
Gearbox	6 speed			6 speed	
Chassis					
Frame	Trellis frame and aluminum plates			Twin spar steel frame	
Front suspension	Kayaba Ø 43 mm USD fork, fully adjustable, 240 mm wheel travel	Kayaba Ø 43 mm USD Off-road tuned fork, fully adjustable, 240 mm wheel travel		Ø 41 mm USD fork, 240 mm wheel travel	
Rear suspension	Kayaba monoshock, fully adjustable, 240 mm wheel travel	Kayaba Off-road tuned monoshock, fully adjustable, 240 mm wheel travel		Monoshock, 220 mm wheel travel	
Front brake	Double Ø 300 mm floating disc. Brembo calipers			Ø 300 mm stainless steel disc with floating caliper	Ø 260 mm Wave disc with floating caliper
Rear brake	Ø 260 mm disc. Brembo caliper			Ø 220 mm stainless steel disc with floating caliper	Ø 220 mm Wavel disc with floating caliper
Front wheel	Spoked wheel with aluminum barrel 21" x 2.15"	Heavy-duty spoked wheel 21" x 1.85" with inner tube		Spoked rim 17" x 2.5"	Spoked rim 21" x 1.85"
Rear wheel	Spoked wheel with aluminum barrel 18" x 4.25"	Heavy-duty spoked wheel 18" x 4.00" with inner tube		Spoked rim 17" x 3.5"	Spoked rim 18" x 2.15"
Dimensions & Weights					
Seat height	860 mm	913 mm		880 mm	905 mm
Fuel tank capacity	18 lt	18 lt		7 lt	
Wet weight*	204 Kg	199 Kg		136 Kg	
Std. Features					
Standard Features	Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard. Engine Maps (AEM), Engine Brake (AEB), Dual-channel ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), 4 Riding Modes. Cruise Control (ACC). Metal Braided Brake Hoses	Full LED headlight and indicators with light signature. Bonded 5" TFT dashboard. Engine Maps (AEM), Engine Brake (AEB), Dual-channel ABS (3 maps and Rear Wheel Lift-up Mitigation), Traction Control (ATC), 4 Riding Modes. Cruise Control (ACC). Rally High Seat, Specific handlebar, Off-road handguards, High Mudguard, SC-Project slip-on, Off-Road skidplate, Chainguide, Rally sidestand, Metal Braided Brake Hoses		Single-channel ABS with anti roll-over system. Full LED headlight and indicators. Digital colored dashboard. Integrated passenger grab handles. Skid-plate	Single-channel ABS with anti roll-over system. Full LED headlight and indicators. Digital colored dashboard. Integrated passenger grab handles. Skid-plate

*According to guideline VO (EU) 168/2013 with all fluids, with standard equipment and fuelled with at least 90% of usable tank volume

SERVICES

X-CARE + MAINTENANCE

Thanks to X-Care + Maintenance, the ordinary maintenance packs, you can ride your Aprilia bike with peace of mind, in the world. Created to meet various needs, by choosing and purchasing one of the available packages, you will receive periodic maintenance as required in the use and maintenance manual.

Check the packages available for the various models with your preferred dealer.

X-CARE + EXTENDED WARRANTY

The X-Care + Extended Warranty completes the dedicated services on offer, protecting your peace of mind when it comes to your Aprilia bike and allowing you to travel worry-free. In addition to 2-year factory warranty, you can enjoy further protection with a 1 or 2 year extended warranty which includes roadside assistance.

- Coverage of repair costs for faults due to manufacturing or assembly defects on parts
- Replacement of any damaged parts with original spare parts, labour included
- Roadside Assistance includes breakdown and towing service to the nearest Piaggio Service point
- Specialised, certified Piaggio Group Service assistance
- Maintenance of the retail value of your used vehicle in case you decide to sell
- Coverage throughout Europe

Ask your dealership or your authorised service centre for full details of the services and coverage available in your country.



With DreamRide, your dream of riding an Aprilia vehicle is even easier to achieve. In fact, you can choose the most suitable financing solution for you, selecting it from a range of services conceived by the Piaggio Group to meet the numerous and changing financing needs.

The company reserves the right to make technical and aesthetic changes at any time. Full information on models and accessories is available at www.aprilia.com. Ride carefully, always wearing a helmet and suitable gear. Always comply with the rules of the road and respect the environment. Read the operating and maintenance manual carefully. Always ask for original and approved spare parts in accordance with current legislation. Visit an Official Aprilia Dealership or Authorised Retailer for a secure purchase and guaranteed service support.

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV
= ISO 14001 =

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001 =

COMPANY WITH
SAFETY SYSTEM
CERTIFIED BY DNV
= OHSAS 18001 =

Aprilia is a registered trademark of Piaggio & C. S.p.A.



aprilia.com